



**UltraLife Wi-Fi series** is especially practical for long term surveillance devices. This module is equipped with low PIR sensor and **Wi-Fi functionality** that allows you to monitor places with low activity movements for a long period of time. The module is placed manually to the covert PIR module, which makes it virtually unrecognizable from the real PIR sensor.


## QUICK SET-UP GUIDE:

- Download application „Yi Eye“
  - Connect the device with supplied USB
  - Connect your phone local Wi-Fi
  - Open Yi Eye
  - Click on the + sign
- If the device has blinking RED diode ➤ Click on RED LED IS BLINKING
- Type in your Wi-Fi password and press „Connect to Wi-Fi“ after that you choose: **Password for you camera**
  - Click on Start Smart Config
  - Your device is now being connected to internet. Click SAVE

## PACKAGE CONTAINS



## PARTS DESCRIPTION

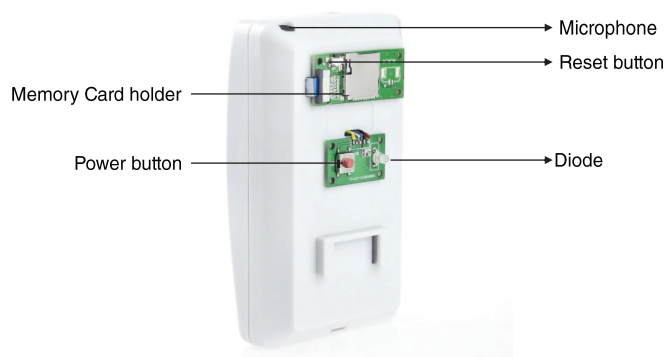

## TROUBLESHOOTING

### Connecting to the application

If the red diode is not blinking, charge the unit again and restart the device by holding power button for 3 seconds then hold RESET button for 20 seconds.

## STATS

- **Working modes**
  - recording mode for motion detection
  - online preview via mobile phone
  - recording in an infinite loop
- **Camera 1.3Mpix CMOS sensor**
  - angle of view of 70°
  - 3.6mm lens
  - light sensitivity 1 Lux
- **Recordings resolution 1280x720px**
  - .AVI video format
  - adjustable recording length 10-60
  - recordings of dates and times
  - the ability to remotely play and export records
  - average 360MB / 1h of recording
- **Microphone**
  - sensitivity up to 3-5 meters
- **Battery**
  - 3.7V 5400mAh Li-Pol
  - up to 180 days in PIR mode
  - lasts about 20 hours of continuous recording
  - lasting 1h daily for approximately 19 days
- **Consumption**
  - Consumption 1-2mA - PIR mode
  - 250mA - Recording
  - 350mA - online transmission
- **Power supply**
  - DC 5V 1A
- **External memory**
  - micro SD up to 32GB
  - up to 88 hours of recording
- **Dimensions 107 x 58 x 45 mm**